


32A 5P (3P+N+E) 6H

32A 5P IP44 CEE Panel-Mounted Socket (Nut Fixing)

PRODUCT CODE BC1-3505-2440



TECHNICAL DRAWING

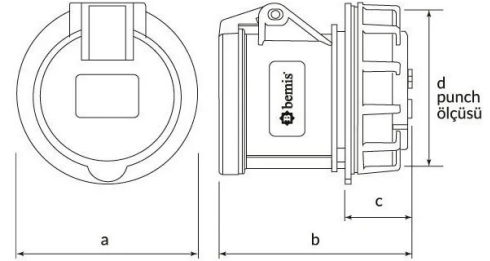

Ölçüler / Dimensions (mm)

a	80	e	
b	68	f	
c	15	g	
d	70	h	

RATED CURRENT

32A 5P

RATED VOLTAGE

380V-450V

POLES

3P+N+E

FREQUENCY

50Hz - 60Hz

IP RATING

IP44

HOUSING MATERIAL

Polyamide 6

QUALITY CERTIFICATES



PRODUCT DESCRIPTION

Bemis 32A 5P IP44 CEE Panel-Mounted Socket (Nut Fixing) (BC1-3505-2440) is a CEE (IEC 60309 type) panel-mounted socket-outlet fixed to enclosures, machines or equipment. With 32A rated current and 3 phases + neutral + earth (5-pin) contact arrangement, it is rated 380V-450V / 50Hz - 60Hz for three-phase systems. IP44 protects against solid objects larger than 1 mm and against water splashing from any direction. Housing material is Polyamide 6 and contacts are MS 58 (brass). The 6h clock position shows where the earth contact sits relative to the keyway and prevents plugs and sockets of different voltage or frequency systems from mating.

TECHNICAL SPECIFICATIONS

ELECTRICAL DATA

Rated Current	32A 5P
Rated Voltage	380V-450V
Poles	3P+N+E
Frequency	50Hz - 60Hz

MECHANICAL & MATERIAL

IP Rating	IP44
-----------	------

Housing Material Polyamide 6

Contact Material MS 58 (brass)


PACKAGING & LOGISTICS

Pieces Per Box	8
Pieces Per Carton	64
Weight (g)	237,8 g


GENERAL

Clock Position	6h
----------------	----

TECHNICAL DRAWING

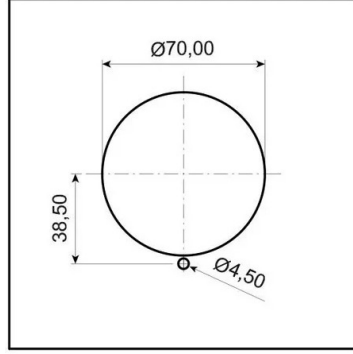**CEE NORM SOMUNLU PANO FİŞ ve PRİZLER İÇİN
UYGULANACAK PUNCH DELİK ÖLÇÜLERİ**

**PRİZİN SIKILACAĞI SACIN KALINLIĞI
3mm - 5mm ARASINDA İSE
UYGULANACAK DELİK**

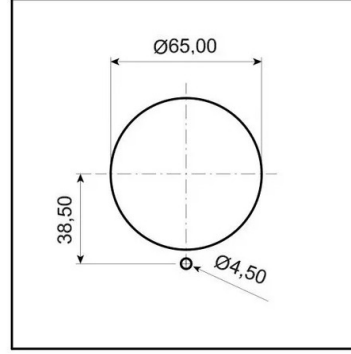

**PRİZİN SIKILACAĞI SACIN KALINLIĞI
1mm - 2,9mm ARASINDA İSE
UYGULANACAK DELİK**