


## METAL CABLE REELS

## Metal Cable Reel – IP67, 40m

PRODUCT CODE BM4-5231-2610



## TECHNICAL DRAWING

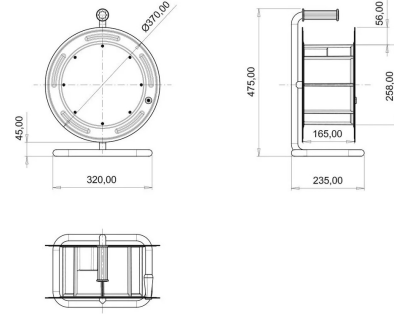

## IP RATING

IP67

## PIECES PER BOX

1

## SOCKET OPTION

With sockets

## CABLE OPTION

Without cable

## CABLE TYPE

5x2,5mm

## CABLE CAPACITY

40 m cable cap...

## QUALITY CERTIFICATES



## PRODUCT DESCRIPTION

Bemis Metal Cable Reel (BM4-5231-2610) is a cable reel used to carry cable neatly and create an extension line on site. Key data – cable capacity: 40m; cable type: 5x2,5mm; socket option: With sockets. IP67 is fully dust-tight and withstands temporary immersion in water. Housing material is 1mm cold-rolled sheet steel.

## TECHNICAL SPECIFICATIONS

## MECHANICAL &amp; MATERIAL

|                  |                             |
|------------------|-----------------------------|
| IP Rating        | IP67                        |
| Housing Material | 1mm cold-rolled sheet steel |

## PACKAGING &amp; LOGISTICS

|                |   |
|----------------|---|
| Pieces Per Box | 1 |
|----------------|---|

## GENERAL

|                |                     |
|----------------|---------------------|
| Socket Option  | With sockets        |
| Cable Option   | Without cable       |
| Cable Type     | 5x2,5mm             |
| Cable Capacity | 40 m cable capacity |

## SOCKET CONFIGURATION

|               | 2 SOCKETS   | 2 SOCKETS   |
|---------------|-------------|-------------|
| Rated Current | 16A         | 32A 5P      |
| Rated Voltage | 220V-250V   | 380V-450V   |
| Poles         | 2P+E        | 3P+N+E      |
| Frequency     | 50Hz - 60Hz | 50Hz - 60Hz |

## CABLE CAPACITY

|        | 1.5 MM <sup>2</sup> | 2.5 MM <sup>2</sup> | 4 MM <sup>2</sup> | 6 MM <sup>2</sup> |
|--------|---------------------|---------------------|-------------------|-------------------|
| 3-core | 80 m                | 60 m                | 40 m              | 35 m              |
| 4-core | 70 m                | 45 m                | 40 m              | 25 m              |
| 5-core | 60 m                | 40 m                | 25 m              | 20 m              |

Values are calculated from the outer diameter of H05VV-F cable. They may vary with the cable brand and type and with how the cable is wound.