


32A 3P (2P+E) 6H

## 32A 3P IP67 CEE Wall-Mounted Inlet

PRODUCT CODE BC1-3403-7210



TECHNICAL DRAWING

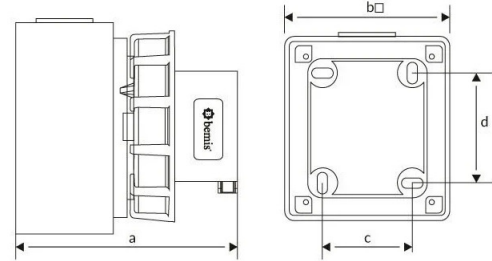

Ölçüler / Dimensions (mm)

|   |       |   |  |
|---|-------|---|--|
| a | 119   | e |  |
| b | 95x95 | f |  |
| c | 55    | g |  |
| d | 55    | h |  |

RATED CURRENT

**32A 3P**

RATED VOLTAGE

**220V-250V**

POLES

**2P+E**

FREQUENCY

**50Hz - 60Hz**

IP RATING

**IP67**

HOUSING MATERIAL

**Polyamide 6**

QUALITY CERTIFICATES



### PRODUCT DESCRIPTION

Bemis 32A 3P IP67 CEE Wall-Mounted Inlet (BC1-3403-7210) is a CEE (IEC 60309 type) wall-mounted inlet used to take supply at a fixed surface point. With 32A rated current and 2 poles + earth (3-pin) contact arrangement, it is rated 220V-250V / 50Hz - 60Hz for single-phase systems. IP67 is fully dust-tight and withstands temporary immersion in water. Housing material is Polyamide 6 and contacts are MS 58 (brass). The 6h clock position shows where the earth contact sits relative to the keyway and prevents plugs and sockets of different voltage or frequency systems from mating.

### TECHNICAL SPECIFICATIONS

#### ELECTRICAL DATA

|               |                    |
|---------------|--------------------|
| Rated Current | <b>32A 3P</b>      |
| Rated Voltage | <b>220V-250V</b>   |
| Poles         | <b>2P+E</b>        |
| Frequency     | <b>50Hz - 60Hz</b> |

#### MECHANICAL & MATERIAL

|                  |                      |
|------------------|----------------------|
| IP Rating        | <b>IP67</b>          |
| Housing Material | <b>Polyamide 6</b>   |
| Contact Material | <b>MS 58 (brass)</b> |

#### PACKAGING & LOGISTICS

|                   |              |
|-------------------|--------------|
| Pieces Per Box    | <b>2</b>     |
| Pieces Per Carton | <b>16</b>    |
| Weight (g)        | <b>461 g</b> |

#### GENERAL

|                |           |
|----------------|-----------|
| Clock Position | <b>6h</b> |
|----------------|-----------|