


63A 3P (2P+E) 6H

63A 3P IP44 CEE 90° Angled Wall-Mounted Inlet (with Pilot Contact)

PRODUCT CODE **BC3-4403-2236**

TECHNICAL DRAWING

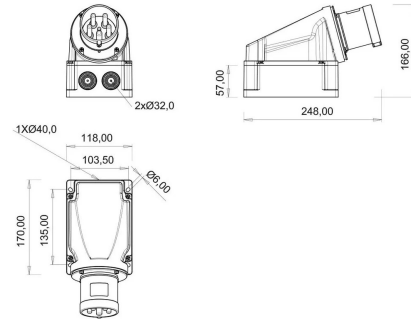

RATED CURRENT

63A 3P

RATED VOLTAGE

220V-250V

POLES

2P+E

FREQUENCY

50Hz - 60Hz

IP RATING

IP44

HOUSING MATERIAL

Polyamide 6

QUALITY CERTIFICATES



PRODUCT DESCRIPTION

Bemis 63A 3P IP44 CEE 90° Angled Wall-Mounted Inlet (with Pilot Contact) (BC3-4403-2236) is a CEE (IEC 60309 type) wall-mounted inlet used to take supply at a fixed surface point. With 63A rated current and 2 poles + earth (3-pin) contact arrangement, it is rated 220V-250V / 50Hz - 60Hz for single-phase systems. IP44 protects against solid objects larger than 1 mm and against water splashing from any direction. Housing material is Polyamide 6 and contacts are MS 58 (brass). The 6h clock position shows where the earth contact sits relative to the keyway and prevents plugs and sockets of different voltage or frequency systems from mating. This version includes a pilot contact.

TECHNICAL SPECIFICATIONS

ELECTRICAL DATA

Rated Current	63A 3P
Rated Voltage	220V-250V
Poles	2P+E
Frequency	50Hz - 60Hz

MECHANICAL & MATERIAL

IP Rating	IP44
Housing Material	Polyamide 6

Contact Material **MS 58 (brass)**Connectable Cable Cross-Section **6 - 16 mm²**

PACKAGING & LOGISTICS

Pieces Per Box	1
Pieces Per Carton	7

GENERAL

Clock Position **6h**