



16A 3P (2P+E) 4H

16A 3P IP44 CEE 90° Angled Wall-Mounted Socket

PRODUCT CODE BC1-1303-2535

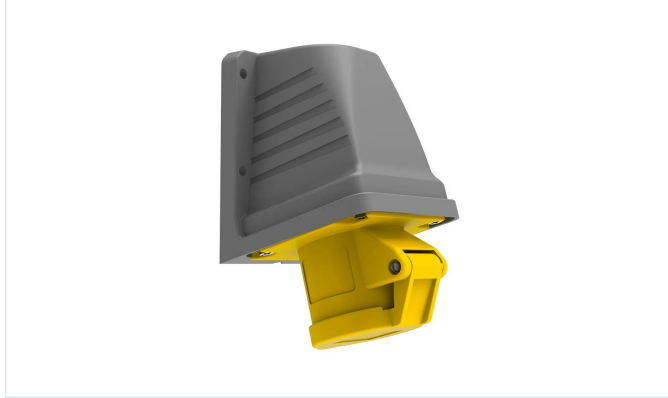

TECHNICAL DRAWING



RATED CURRENT

16A 3P

RATED VOLTAGE

110V-150V

POLES

2P+E

FREQUENCY

50Hz - 60Hz

IP RATING

IP44

HOUSING
MATERIAL

Polyamide 6

QUALITY CERTIFICATES



PRODUCT DESCRIPTION

Bemis 16A 3P IP44 CEE 90° Angled Wall-Mounted Socket (BC1-1303-2535) is a CEE (IEC 60309 type) wall-mounted socket-outlet for surface installation. With 16A rated current and 2 poles + earth (3-pin) contact arrangement, it is rated 110V-150V / 50Hz - 60Hz for 110 V systems. IP44 protects against solid objects larger than 1 mm and against water splashing from any direction. Housing material is Polyamide 6 and contacts are MS 58 (brass). The 4h clock position shows where the earth contact sits relative to the keyway and prevents plugs and sockets of different voltage or frequency systems from mating.

TECHNICAL SPECIFICATIONS

ELECTRICAL DATA		Contact Material	MS 58 (brass)
Rated Current	16A 3P	Connectable Cable Cross-Section	1.5 - 4 mm²
Rated Voltage	110V-150V		
Poles	2P+E	PACKAGING & LOGISTICS	
Frequency	50Hz - 60Hz	Pieces Per Box	3
MECHANICAL & MATERIAL		Pieces Per Carton	36
IP Rating	IP44	Weight (g)	223 g
Housing Material	Polyamide 6	GENERAL	
		Clock Position	4h