


32A 5P (3P+N+E) 6H

# 32A 5P IP67 CEE 90° Angled Wall-Mounted Socket

PRODUCT CODE BC1-3505-7535



## TECHNICAL DRAWING

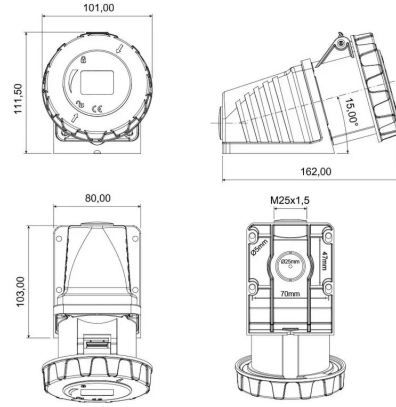

RATED CURRENT

**32A 5P**

RATED VOLTAGE

**380V-450V**

POLES

**3P+N+E**

FREQUENCY

**50Hz - 60Hz**

IP RATING

**IP67**

HOUSING

MATERIAL

**Polyamide 6**

## QUALITY CERTIFICATES



## PRODUCT DESCRIPTION

Bemis 32A 5P IP67 CEE 90° Angled Wall-Mounted Socket (BC1-3505-7535) is a CEE (IEC 60309 type) wall-mounted socket-outlet for surface installation. With 32A rated current and 3 phases + neutral + earth (5-pin) contact arrangement, it is rated 380V-450V / 50Hz - 60Hz for three-phase systems. IP67 is fully dust-tight and withstands temporary immersion in water. Housing material is Polyamide 6 and contacts are MS 58 (brass). The 6h clock position shows where the earth contact sits relative to the keyway and prevents plugs and sockets of different voltage or frequency systems from mating.

## TECHNICAL SPECIFICATIONS

### ELECTRICAL DATA

|               |                    |
|---------------|--------------------|
| Rated Current | <b>32A 5P</b>      |
| Rated Voltage | <b>380V-450V</b>   |
| Poles         | <b>3P+N+E</b>      |
| Frequency     | <b>50Hz - 60Hz</b> |

### MECHANICAL & MATERIAL

|                  |                    |
|------------------|--------------------|
| IP Rating        | <b>IP67</b>        |
| Housing Material | <b>Polyamide 6</b> |

Contact Material **MS 58 (brass)**Connectable Cable Cross-Section **2.5 - 10 mm<sup>2</sup>**

### PACKAGING & LOGISTICS

|                   |           |
|-------------------|-----------|
| Pieces Per Box    | <b>3</b>  |
| Pieces Per Carton | <b>36</b> |

### GENERAL

Clock Position **6h**