


63A 4P (3P+E) 6H

# 63A 4P IP44 CEE 90° Angled Wall-Mounted Inlet

PRODUCT CODE BC1-4504-2236



TECHNICAL DRAWING

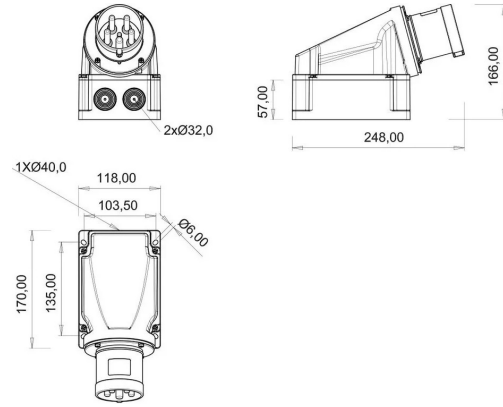

RATED CURRENT

**63A 4P**

RATED VOLTAGE

**380V-450V**

POLES

**3P+E**

FREQUENCY

**50Hz - 60Hz**

IP RATING

**IP44**

HOUSING MATERIAL

**Polyamide 6**

QUALITY CERTIFICATES



## PRODUCT DESCRIPTION

Bemis 63A 4P IP44 CEE 90° Angled Wall-Mounted Inlet (BC1-4504-2236) is a CEE (IEC 60309 type) wall-mounted inlet used to take supply at a fixed surface point. With 63A rated current and 3 phases + earth (4-pin) contact arrangement, it is rated 380V-450V / 50Hz - 60Hz for three-phase systems. IP44 protects against solid objects larger than 1 mm and against water splashing from any direction. Housing material is Polyamide 6 and contacts are MS 58 (brass). The 6h clock position shows where the earth contact sits relative to the keyway and prevents plugs and sockets of different voltage or frequency systems from mating.

## TECHNICAL SPECIFICATIONS

### ELECTRICAL DATA

|               |             |
|---------------|-------------|
| Rated Current | 63A 4P      |
| Rated Voltage | 380V-450V   |
| Poles         | 3P+E        |
| Frequency     | 50Hz - 60Hz |

### MECHANICAL & MATERIAL

|           |      |
|-----------|------|
| IP Rating | IP44 |
|-----------|------|

Housing Material **Polyamide 6**Contact Material **MS 58 (brass)**

### PACKAGING & LOGISTICS

|                   |       |
|-------------------|-------|
| Pieces Per Box    | 1     |
| Pieces Per Carton | 7     |
| Weight (g)        | 155 g |

### GENERAL

|                |    |
|----------------|----|
| Clock Position | 6h |
|----------------|----|