


63A 3P (2P+E) 4H

63A 3P IP44 CEE 90° Angled Wall-Mounted Socket with Panel Socket (with Pilot Contact)

PRODUCT CODE BC3-4303-2537



TECHNICAL DRAWING

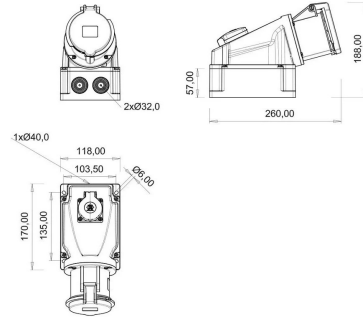

RATED CURRENT

63A 3P

RATED VOLTAGE

110V-150V

POLES

2P+E

FREQUENCY

50Hz - 60Hz

IP RATING

IP44

HOUSING MATERIAL

Polyamide 6

QUALITY CERTIFICATES



PRODUCT DESCRIPTION

Bemis 63A 3P IP44 CEE 90° Angled Wall-Mounted Socket with Panel Socket (with Pilot Contact) (BC3-4303-2537) is a CEE (IEC 60309 type) wall-mounted socket-outlet for surface installation. With 63A rated current and 2 poles + earth (3-pin) contact arrangement, it is rated 110V-150V / 50Hz - 60Hz for 110 V systems. IP44 protects against solid objects larger than 1 mm and against water splashing from any direction. Housing material is Polyamide 6 and contacts are MS 58 (brass). The 4h clock position shows where the earth contact sits relative to the keyway and prevents plugs and sockets of different voltage or frequency systems from mating. This version includes a pilot contact.

TECHNICAL SPECIFICATIONS

ELECTRICAL DATA

Rated Current	63A 3P
Rated Voltage	110V-150V
Poles	2P+E
Frequency	50Hz - 60Hz

MECHANICAL & MATERIAL

IP Rating	IP44
Housing Material	Polyamide 6

Contact Material MS 58 (brass)

Connectable Cable Cross-Section 6 - 25 mm²

PACKAGING & LOGISTICS

Pieces Per Box	1
Pieces Per Carton	7

GENERAL

Clock Position 4h