


63A 4P (3P+E) 6H

## 63A 4P IP44 CEE Connector

PRODUCT CODE BCS-4504-2312



### TECHNICAL DRAWING

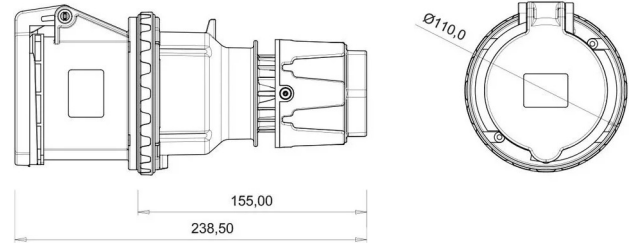

RATED CURRENT

**63A 4P**

RATED VOLTAGE

**380V-450V**

POLES

**3P+E**

FREQUENCY

**50Hz - 60Hz**

IP RATING

**IP44**HOUSING  
MATERIAL**Polyamide 6**

### QUALITY CERTIFICATES



### PRODUCT DESCRIPTION

Bemis 63A 4P IP44 CEE Connector (BCS-4504-2312) is a CEE (IEC 60309 type) connector (portable socket-outlet) fitted to the end of a flexible cable to create a mobile power point. With 63A rated current and 3 phases + earth (4-pin) contact arrangement, it is rated 380V-450V / 50Hz - 60Hz for three-phase systems. IP44 protects against solid objects larger than 1 mm and against water splashing from any direction. Housing material is Polyamide 6 and contacts are MS 58 (brass). The 6h clock position shows where the earth contact sits relative to the keyway and prevents plugs and sockets of different voltage or frequency systems from mating.

### TECHNICAL SPECIFICATIONS

#### ELECTRICAL DATA

|               |                    |
|---------------|--------------------|
| Rated Current | <b>63A 4P</b>      |
| Rated Voltage | <b>380V-450V</b>   |
| Poles         | <b>3P+E</b>        |
| Frequency     | <b>50Hz - 60Hz</b> |

#### MECHANICAL & MATERIAL

|           |             |
|-----------|-------------|
| IP Rating | <b>IP44</b> |
|-----------|-------------|

|                  |                      |
|------------------|----------------------|
| Housing Material | <b>Polyamide 6</b>   |
| Contact Material | <b>MS 58 (brass)</b> |

#### PACKAGING & LOGISTICS

|                   |           |
|-------------------|-----------|
| Pieces Per Box    | <b>1</b>  |
| Pieces Per Carton | <b>12</b> |

#### GENERAL

|                |           |
|----------------|-----------|
| Clock Position | <b>6h</b> |
|----------------|-----------|